

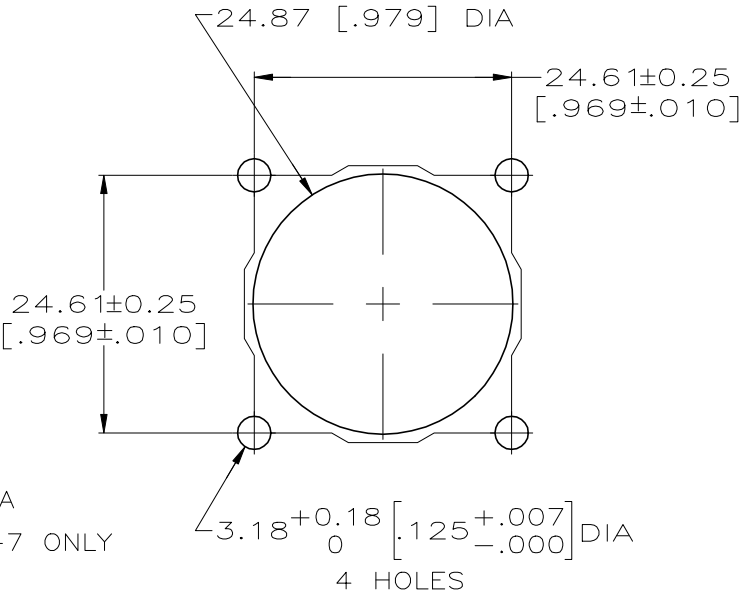
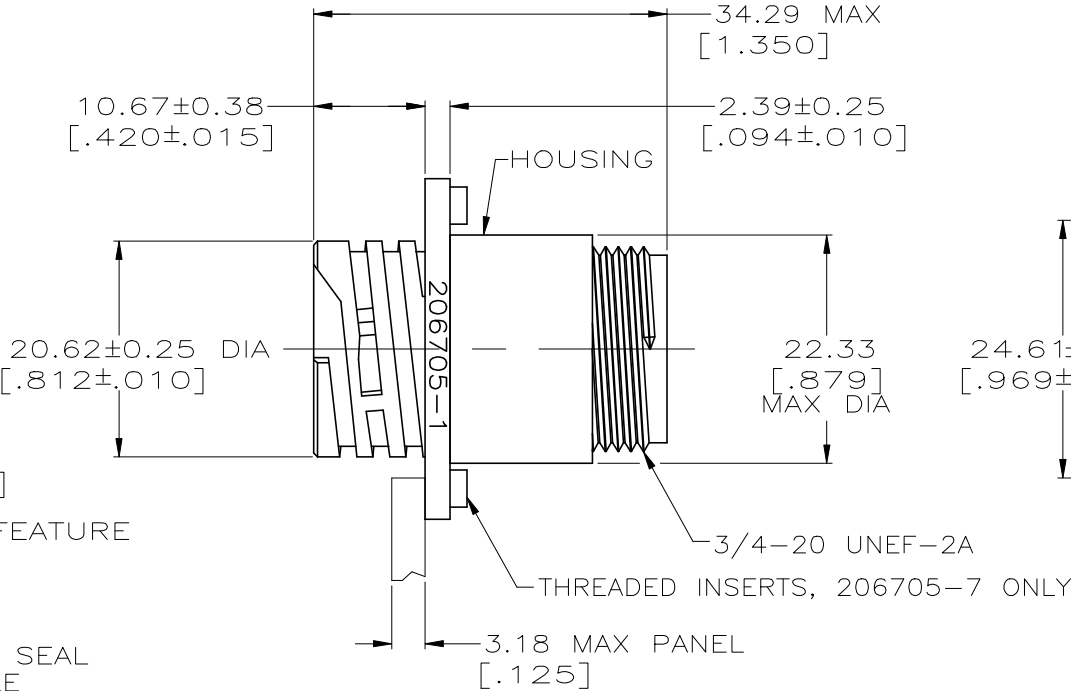
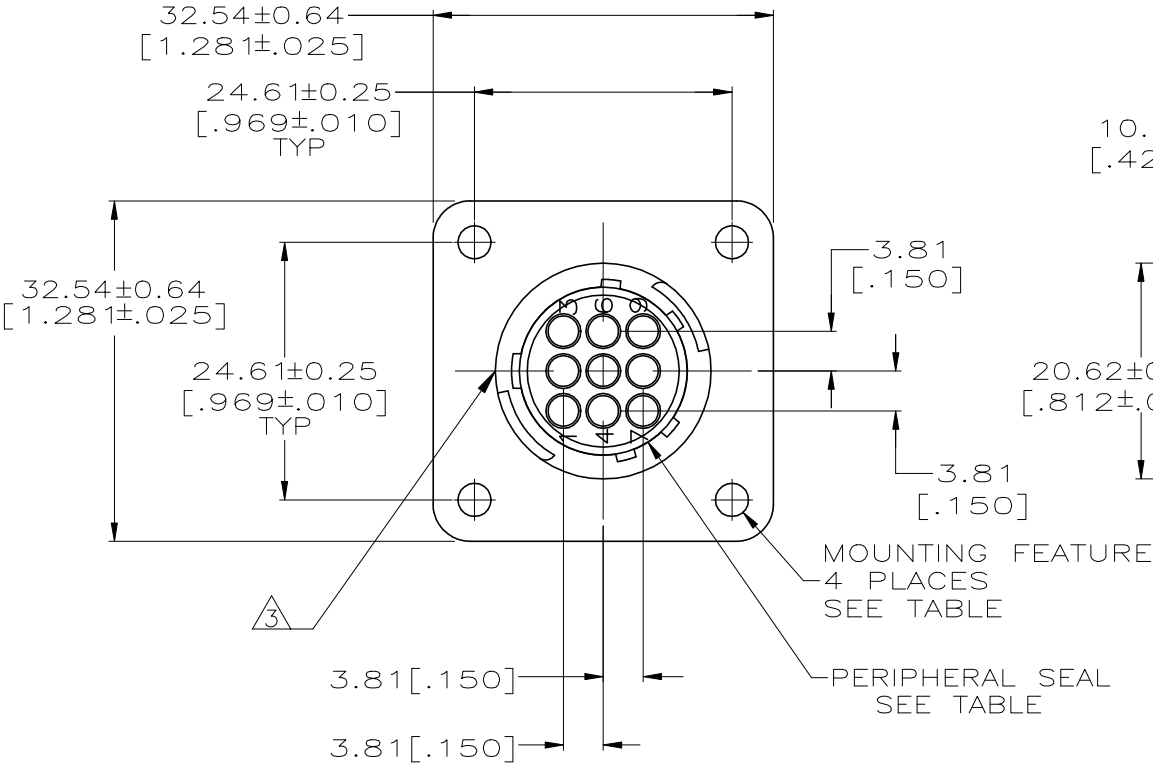


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	M	REVISED PER ECO-12-015521	28SEP12	KH	MZ
	N	REVISED PER ECO-17-000037	10MAR2017	RS	MZ
	P	REVISED PER ECO-19-014836	21OCT2019	RS	MZ

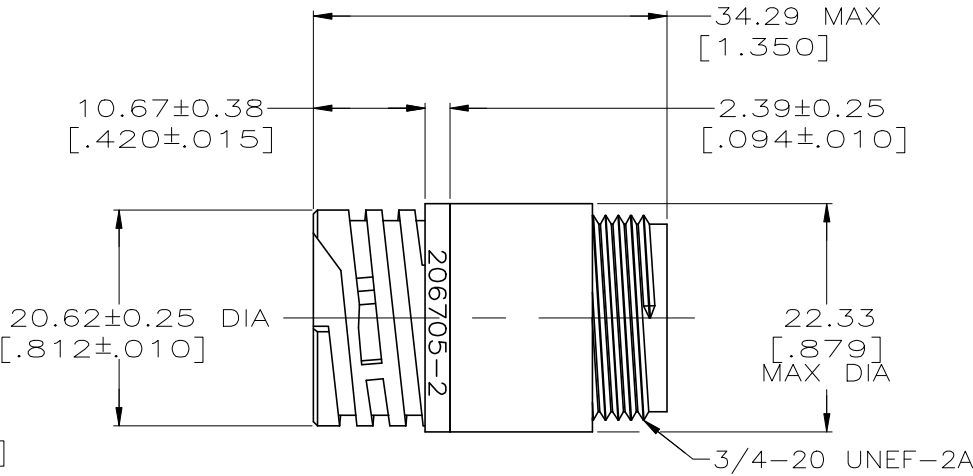

RECOMMENDED PANEL CUTOUT

DETAIL A

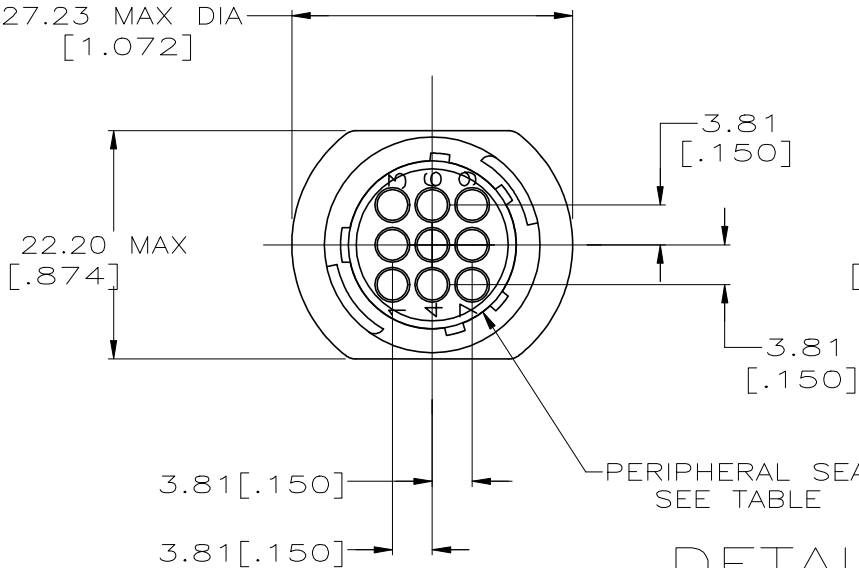

DETAIL B

#4-40 THREADED INSERTS ø3.18 (.125) HOLES	3	NO	A	206705-7
		NO	A	206705-5
		YES	B	206705-4
		YES	A	206705-3
		NO	B	206705-2
ø3.18 (.125) HOLES	-	NO	B	206705-2
		NO	A	206705-1
		NO	A	206705-1
MOUNTING FEATURE	NOTES	PERIPHERAL SEAL	SEE DETAIL	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D.HARDY 05/19/94	 TE Connectivity			
		CHK R.STONE 05/20/94				
DIMENSIONS: MM [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD —	RECEPTACLE HOUSING, STANDARD SEX, SHELL SIZE 13, CPC			
	0 PLC ± —	PRODUCT SPEC				
	1 PLC ± —	108-10024				
	2 PLC ± 0.13 [.005]	APPLICATION SPEC				
	3 PLC ± —	—	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO —
	4 PLC ± —	WEIGHT —	A2	00779	C-206705	
	ANGLES ± —	FINISH —	CUSTOMER DRAWING			
MATERIAL 			SCALE 2:1	SHEET 1 of 1	REV P	

- 1 CAVITY IDENTIFICATION ON FRONT AND REAR FACE.
- 2 RECEPTACLE WILL ACCEPT NINE (9) MULTIMATE PIN CONTACTS.
- 3 WHITE DOT OVER MAJOR KEY, APPROX WHERE SHOWN.
- 4 OBSOLETE PART NUMBER.
- 5 MATERIALS
HOUSING: PA66, BLACK
PERIPHERAL SEAL: NITRILE BUTADIENE RUBBER, BLACK
THREADED INSERTS: BRASS